

LZi

High efficiency air to water heat pumps with INVERTER compressor



R410A

-20°C

+43°C


+60°C

DC
INVERTER

Vtee

FLOATING FRAME

ZZ



The LZi series of high efficiency heat pumps has been specifically designed for use with radiant floor heating systems or those applications where it is necessary to have maximum efficiency when heating.

They have been optimized on heating mode, are able to produce water up to 60°C and can operate down to -20°C ambient temperature.

LZi units are available in 2 or 4 pipe (SW6) versions.

Both versions can produce domestic hot water, in the standard LZi through the activation of an external 3-way-valve and in the SW6 version by means of a separate heat exchanger and hydraulic circuit for the domestic hot water.

All models are supplied as standard with a reversing valve for defrost and cold water production in summer.

VERSIONS

STD	2 pipes reversible standard.
SW6	4 pipes unit capable of producing hot and cold water at the same time on two independent hydraulic circuits.

ACCESSORIES

E1NT	Hydraulic kit with inverter pump.
INSE	Serial interface card RS485.
KAVG	Rubber anti-vibration mountings.
RAES	User and recovery heat exchanger antifreeze kit.
VECC	High static pressure E.C. fans.
VECE	E.C. fans.

LZi - LZi/SW6 Models		08	10	15	20
Energy Class in low temperature - According to EU reg. 811/2013		A++	A++	A++	A++
Heating capacity (EN14511) ⁽¹⁾	kW	7,7	9,6	15,0	19,0
Total input power (EN14511) ⁽¹⁾	kW	1,84	2,34	3,57	4,63
COP (EN14511) ⁽¹⁾	W/W	4,2	4,2	4,2	4,1
Heating capacity (EN14511) ⁽²⁾	kW	6,1	7,1	11,5	13,5
Total input power (EN14511) ⁽²⁾	kW	2,18	2,62	3,96	5,0
COP (EN14511) ⁽²⁾	W/W	2,8	2,7	2,9	2,7
Cooling capacity (EN14511) ⁽³⁾	kW	7,9	9,3	14,5	18,4
Total input power (EN14511) ⁽³⁾	kW	2,08	2,45	3,81	4,84
EER (EN14511) ⁽³⁾	W/W	3,8	3,8	3,8	3,8
Cooling capacity (EN14511) ⁽⁴⁾	kW	7,1	8,5	13,5	16,0
Total input power (EN14511) ⁽⁴⁾	kW	2,37	2,83	4,50	5,33
EER (EN14511) ⁽⁴⁾	W/W	3,0	3,0	3,0	3,0
Power supply	V/Ph/Hz	230/1/50	230/1/50	400/3+N/50	400/3+N/50
Max input current standard unit	A	16,0	19,9	13,5	15,0
Peak current standard unit	A	15,6	19,5	14,5	14,9
Fans	n°	1	1	2	2
Compressors	n°	1 DC Inverter	1 DC Inverter	1 DC Inverter	1 DC Inverter
Sound power level ⁽⁵⁾	dB (A)	65	65	67	67
Sound pressure level ⁽⁶⁾	dB (A)	37	37	39	39

Performances refer to the following conditions:

(1) Heating: Ambient temperature 7°C DB, 6°C WB, water temperature 30/35°C.

(2) Heating: Ambient temperature -7°C DB, -8°C WB, water temperature 30/35°C.

(3) Cooling: ambient temperature 35°C, water temperature 23/18°C.

(4) Cooling: ambient temperature 35°C, water temperature 12/7°C.

(5) Sound power level in accordance with ISO 9614.

(6) Sound pressure level at 10 mt from the unit in free field conditions direction factor Q=2, calculated in accordance with ISO 9614.

FRAME

All LZi units are made from hot-galvanised sheet steel, painted with polyurethane powder enamel and stoved at 180°C to provide maximum protection against corrosion. The frame is self-supporting with removable panels. All screws and rivets used are made from stainless steel.

The standard colour of the units is RAL9018.

REFRIGERANT CIRCUIT

The refrigerant circuit is made by using components from leading international companies in accordance with ISO 97/23 for the of braze welding processes.

The refrigerant used is R410A.

The refrigerant circuit includes: sight glass, filter drier, electronic expansion valve, 4-way valve, check valves, liquid receiver, Schrader valves for maintenance and control, a safety device (according to PED regulation).

COMPRESSORS

The compressors are high-efficiency scroll type, variable-speed modulation capability through DC inverter, supplied with a special design that increases the efficiency of the refrigeration cycle under conditions of very low

ambient temperature. The compressors are equipped with an innovative electric motor permanent magnet brushless DC inverter-driven, high-efficiency, are all equipped with electrical resistance and thermal overload protection.

SOURCE HEAT EXCHANGER

The source heat exchanger is made from 3/8" copper pipes and 0,1mm thick aluminium fins with the tubes being mechanically expanded into the aluminium fins in order to maximise heat transfer. Furthermore, the design guarantees a low air side pressure drop thus enabling the use of low rotation speed (and hence low noise) fans.

USER HEAT EXCHANGERS

The user heat exchanger is a braze welded, plate type heat exchanger, manufactured from AISI 316 stainless steel. Utilisation of this type of exchanger results in a massive reduction of the refrigerant charge of the unit compared to a traditional shell-in-tube type. A further advantage is a reduction in the overall dimensions of the unit.

The exchangers are factory insulated with flexible close cell material and can be fitted with an antifreeze heater (accessory).

Each exchanger is fitted with a temperature sensor on the discharge water side for anti-freeze protection.

FANS

The fans are direct drive axial type with aluminium aerofoil blades, are statically and dynamically balanced and are supplied complete with a safety fan guard complying with the requirements of EN 60335. They are fixed to the unit frame via rubber anti-vibration mountings. The electric motors are 6 pole type rotating at approximately 900 rpm. As standard, all units are fitted with a pressure operated fan speed controller. The motors are fitted with integrated thermal overload protection and have a moisture protection rating of IP 54.

MICROPROCESSORS

All LZi units are supplied as standard with microprocessor controls. The microprocessor controls the following functions: control of the water temperature, antifreeze protection, compressor timing, compressor automatic starting sequence (For multiple compressors), alarm reset. The control panel is supplied with display showing all operational icons. The microprocessor is

set for automatic defrost (when operating in severe ambient conditions) and for summer/ winter change over.

The control also manages the anti-legionella program, the integration with other heating sources (electric heaters, boilers, solar panels etc), the operation of a three port modulating valve (for diverting to DHW or heating) and both the heating circuit pump and the domestic hot water circuit pump. If required (available as an option), the micro-processor can be configured in order for it to connect to a site BMS system thus enabling remote control and management. The Hidros technical department can discuss and evaluate, in conjunction with the customer, solutions using MODBUS protocols.

ELECTRIC ENCLOSURE

The enclosure is manufactured in order to comply with the requirements of the electromagnetic compatibility standards CEE 73/23 and 89/336. Access to the enclosure is achieved by removing the front panel of the unit. The following components are supplied as standard on all units: main switch, a sequence relay that disables the power supply in the event that the phase sequence is incorrect (scroll compressors can be damaged if they rotate in the wrong direction), thermal overloads (protection of pumps and fans), compressor fuses, control circuit automatic breakers, compressor contactors, fan contactors and pump contactors. The terminal board has volt free contacts for remote ON-OFF, Summer/ winter change over (heat pumps only) and general alarm.

CONTROL AND PROTECTION DEVICES

All units are supplied with the following

controls and protections: user water return temperature sensor, antifreeze protection temperature sensor installed on users water output, domestic hot water supply and return temperature sensors (only versions SW6), high pressure manual reset, low pressure automatic reset, compressor thermal protection, air fan, thermal protection, pressure transducer (used to optimize the defrost cycle and to adjust the fan speed depending on ambient conditions), flow switch. All units are also fitted with a temperature probe sensor with "Energy Saving" function, supplied in a separate plastic box, which can be used to stop the pump use during periods of stand-by, when the water temperature reaches the set point. Doing this the power consumption of the unit is strongly reduced. The probe sensor must be positioned in the hydraulic compensator present at the screening technique. The domestic hot water circuit (only versions SW6) is already equipped with this probe, but it must be installed in the user circuit.

NOISE REDUCTION

All units are supplied, as standard, with the latest 'Floating Frame' technology that completely isolates the compressors from the main casing, thereby eliminating vibration and noise from this source. The 'Floating Frame' is a special vibration and acoustic damping system that consists of a base plate and acoustic enclosure that houses the compressors. The base plate is separated from the supporting frame of the unit by soft steel springs that have a high damping power. Within the enclosure, the compressors are mounted on rubber shock absorbers on the floating base plate. The enclosure is manufactured from galvanized



steel sandwich panels that have a micro-perforated inner skin and a core of 50 mm thick, high density (40 kg/m³) mineral wool. The entire arrangement provides a double damping system and acoustic attenuation. The compressor refrigerant pipes are connected to the 'fridge circuit via "anaconda" flexible connections. Flexible connections are also used on the water pipework within the unit. The combination of these systems results in an overall noise reduction in the region of 10-12 dB(A).

OTHER VERSIONS


LZi/SW6 UNIT WITH INDEPENDENT DOMESTIC HOT WATER PRODUCTION

This version is fitted with an additional heat exchanger, used as condenser, to produce domestic hot water irrespective of the operation mode of the unit. The activation of the additional heat exchanger is performed automatically by the microprocessor control when the domestic hot water temperature, measured by the sensor, is lower than the required set point. If, during the summer months, the unit is operating on cooling, this version can produce hot and cold water simultaneously. This version is equipped with return and supply domestic hot water sensors and an advanced control panel with specific software for management of the system priorities.


OPERATION LIMITS

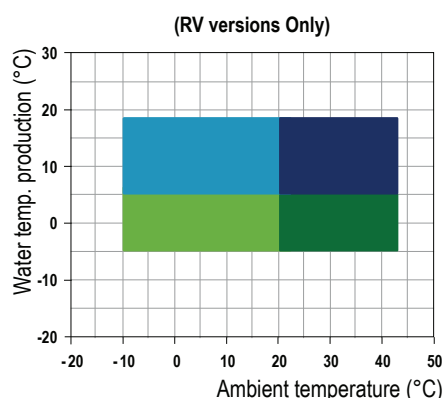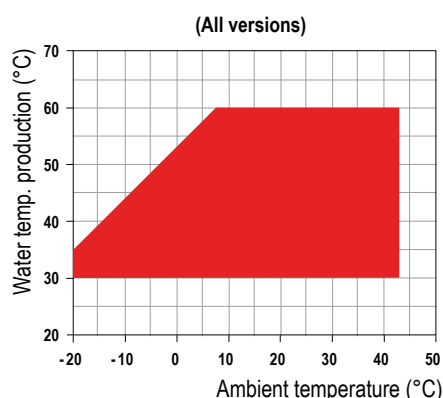

- Heating mode
- Cooling with head pressure control
- Cooling with head pressure control
- Cooling with head pressure control and glycol
- Cooling with head pressure control and glycol

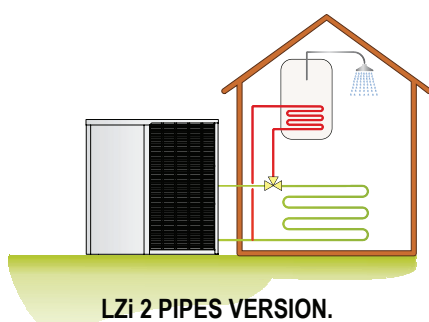


LZi 2 PIPES VERSION.

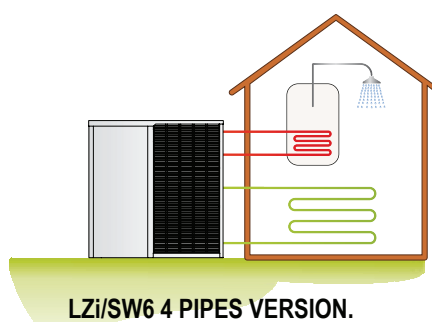


LZi/SW6 4 PIPES VERSION.

LZi - LZi/SW6 Options	Code	08	10	15	20
Main switch		●	●	●	●
Compressor automatic switch		●	●	●	●
Flow switch		●	●	●	●
User water strainer		●	●	●	●
Evap/condens pressure control by transducer and fan speed control	DCCF	●	●	●	●
Fresh air temperature probe for set-point compensation	SOND	●	●	●	●
Specific software for operation priorities		●	●	●	●
Remote ON/OFF digital input		●	●	●	●
Summer/Winter digital input		●	●	●	●
Floating frame technology		●	●	●	●
Condensate discharge drip tray with antifreeze heater	BRCA	●	●	●	●
Electronic Expansion Valve	VTEE	●	●	●	●
Electronic Soft starter	DSSE	●	●	●	●
Remotable control panel		●	●	●	●
High efficiency fans		●	●	●	●
Water strainer		●	●	●	●
E1NT Hydraulic kit (pump only)	E1NT	○	○	○	○
Rubber anti-vibration mountings.	KAVG	○	○	○	○
Antifreeze kit	RAES	○	○	○	○
Serial interface card RS485 with MODBUS protocol	INSE	○	○	○	○
E.C. fans	VECE	○	○	○	○
High static pressure E.C. fans	VECC	○	○	○	○

● Standard, ○ Optional, – Not available.

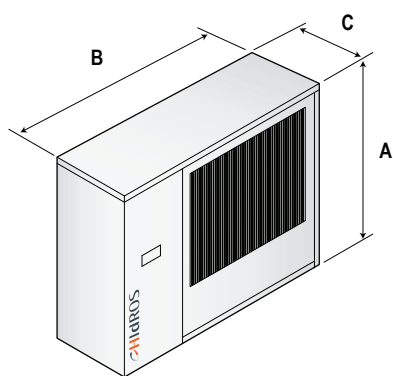

LZi 08÷10

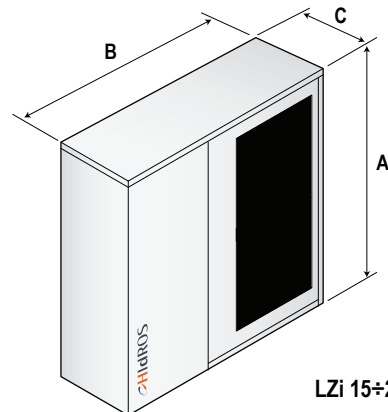

LZi 15÷20

Mod.	A (mm)	B (mm)	C (mm)	Kg
08	1230	1205	555	180
10	1230	1205	555	180

Mod.	A (mm)	B (mm)	C (mm)	Kg
15	1430	1405	555	270
20	1430	1405	555	270